


TECHNICAL SHEET

PET Cloth Tape (IF3HA)

Description : This product is made by a **low VOC, high abrasion resistance** PET cloth, single coated with a pressure sensitive **acrylic-based** adhesive.

Application : Specially designed for sophisticated applications in the interior of the car. The product is suitable for wrapping of automotive electrical wiring harnesses to provide high abrasion protection.

Composition :

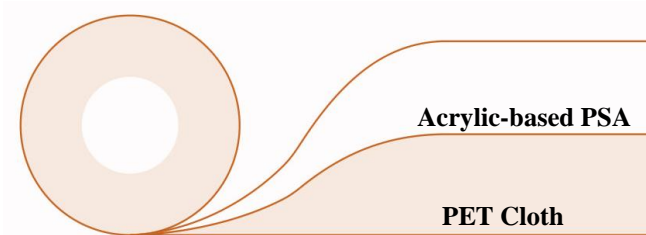

Technical Details :

Properties	Units	IF3HA
Total Thickness	µm	260 ± 15
180° Peel Strength(to Steel)	N/cm	4.63
Tensile strength	N/cm	220
Elongation at break	%	25
Unwind force	N/19mm	6.96
Temperature resistance min.	°C	-40
Temperature resistance (3000h)	°C	150
Abrasion resistance (10mm mandrel)	-	Class D (acc. To LV312)
Abrasion resistance (5mm mandrel)	-	Class D (acc. To LV312)
Flame resistance as composite	-	Class B (acc. to LV312)
Noise damping (decibel)	-	Class A (acc. to LV312)

Color : Black.

Dimensions : § Roll length : 10 ~ 25 m.

§ Roll width : 19 mm and 25 mm.

§ Core : 38 mm.

All statements and recommendations given herein are based on the tests and experiences believed to be reliable; however, Symbio, Inc. makes no warranties and express as to its accuracy. The customers are solely responsible for the final determination of the suitability of the Symbio, Inc. products use for particular purposes and applications. (2018/09/20)